

# Sim Racing Pedals Manual



*Invicta™-S*

**Thank you for purchasing the Asetek SimSports® Invicta™ S-Series pedals.**

You have made an excellent choice! We are sure the Invicta™ S-Series pedals will help you take your sim racing career to the next level. Whether you are a beginner or an experienced racer, you will now be able to reach ultimate immersion.

Prepare for the sensation of being in a real race car.

# Table of contents

|  |    |   |    |
|--|----|---|----|
| Foreword .....                                       | 2  | 4.2.6 Throttle Spring Replacement .....         | 21 |
| About This Document .....                            | 2  | 4.2.7 Throttle Travel Distance Adjustment ..... | 23 |
| Other Relevant Documents .....                       | 2  | 4.2.8 Swapping Elastomers .....                 | 24 |
| Symbols Used .....                                   | 3  | 4.2.9 Elastomer Types .....                     | 26 |
| Copyright .....                                      | 3  | 4.2.10 Brake Pedal Preload Adjustment .....     | 27 |
| 1. Introduction .....                                | 3  | 4.3 Connecting to your PC .....                 | 29 |
| 1.1 Box Contents .....                               | 4  | 4.4 Start Racing! .....                         | 30 |
| 1.2 Videos .....                                     | 5  | 5. RaceHub™ Adjustments .....                   | 30 |
| 1.3 Manual version .....                             | 5  | 5.1 RaceHub™ Download .....                     | 30 |
| 1.4 Support & Contact .....                          | 5  | 5.1.1 RaceHub™ Installation .....               | 30 |
| 2. Product .....                                     | 5  | 5.1.2 RaceHub™ Updating .....                   | 31 |
| 2.1 Intended Use .....                               | 5  | 5.2 Introduction .....                          | 31 |
| 2.2 Compatibility .....                              | 6  | 5.3 Pedal Calibration .....                     | 31 |
| 2.3 Reasonably Foreseeable Unintended Use .....      | 6  | 5.4 Deadzone Adjustments .....                  | 32 |
| 2.4 General Specifications .....                     | 6  | 5.5 Maximum Brake Force Adjustment .....        | 33 |
| 3. Product Overview .....                            | 7  | 5.6 Custom Pedal Mapping .....                  | 34 |
| 4. Getting Started .....                             | 8  | 6. Maintenance .....                            | 35 |
| 4.1 Installing your Pedals .....                     | 8  | 6.1 Throttle Maintenance .....                  | 35 |
| 4.1.1 Tools Required .....                           | 8  | 6.2 Brake Maintenance .....                     | 35 |
| 4.1.2 Optional Tools .....                           | 8  | 6.3 Spare Parts .....                           | 35 |
| 4.1.3 Mounting to your Rig .....                     | 8  | 7. Troubleshooting .....                        | 36 |
| 4.2 Adjusting the Pedals .....                       | 11 | 8. Safety .....                                 | 37 |
| 4.2.1 Pedal Face Plate Adjustments .....             | 12 | 9. De-commissioning & Sustainability .....      | 38 |
| 4.2.2 How Does the T.H.O.R.P.™ System Function ..... | 13 | 9.1 Packaging .....                             | 38 |
| 4.2.3 Adjusting the Brake Pedal Angle .....          | 16 | 9.2 Product .....                               | 38 |
| 4.2.4 Throttle Pedal Angle Adjustment .....          | 18 | 9.3 Production .....                            | 39 |
| 4.2.5 Throttle Preload Adjustment .....              | 19 | 10. Declaration of Conformity .....             | 39 |

# Foreword

## About This Document

This manual is written for the end-user of the Asetek SimSports® Invicta™ S-Series pedals (hereon after: “pedals”) and contains all information required to correctly and safely install, use and maintain the following models:

|                     |   |
|---------------------|---|
| <b>Model Name</b>   | <b>P-BT-1</b>                                 |
| <b>Product Name</b> | <b>Invicta™ S-Series Brake &amp; Throttle</b> |
| <b>Product Code</b> | <b>40-010-0010006</b>                         |

This manual was authored in English. All other languages are translations of the original document.

Please make sure that you have thoroughly read and understood all contents of this manual before installing, using, or performing maintenance on the pedals.

- Be aware that some product illustrations feature the regular Asetek SimSports® Invicta™ pedal set. The procedure is unchanged between the two products.

If anything in this manual is unclear, please contact Asetek SimSports® Support (available on [www.asetek.com/simsports/support/](http://www.asetek.com/simsports/support/)).

Please note the serial number on your product before contacting the support. The serial number can be found on the bottom of the brake base plate and written here for your convenience:



|  |   |
|--|---|
| <b>Serial Number</b>   |   |
| <b>Asetek Denmark A/S</b><br><b>Assensvej 2</b><br><b>9220 Aalborg East</b><br><b>Denmark</b><br><b><a href="http://www.asetek.com">www.asetek.com</a></b> |  |

## Other Relevant Documents

These documents may assist you in your quest for faster lap times:

Mounting patterns, software, DoC, and other installation manuals can be found here:

[www.asetek.com/simsports/knowledge-base/](http://www.asetek.com/simsports/knowledge-base/)

## Symbols Used

Make sure you pay attention to all warnings and symbols on the product and packaging.

---

Indicates that minor to moderate injuries may be sustained if the instruction is not followed correctly



This indicates that the product could be damaged if the instruction is not followed correctly

---



## Copyright

The content of this manual is protected by copyright and other international intellectual property laws. The contents of this manual or any parts thereof may only be made public, copied, modified, reproduced, translated with express written permission from Asetek. This manual or any parts thereof may only be published, transmitted, displayed, or made available to a third party with express written permission from Asetek SimSports®.


# 1. Introduction

Thank you for purchasing the Asetek SimSports® Invicta™ S-Series pedals. We strongly encourage you to read through this manual thoroughly in its entirety. The Invicta™ S-Series pedals are a premium product made to fit each user. They have an excellent baseline adjustment out of the box, and we strongly encourage you to drive for 5+ hours with the baseline adjustments before changing anything. After that, your full immersion racing experience is unlocked when they are adjusted to your personal preference.

# 1.1 Box Contents

The box contains the following components and accessories:

- Invicta™ S-Series T.H.O.R.P. Brake
- Invicta™ S-Series Throttle
- Flyer with QR code to online manual
- Safety information
- Warranty statement
- Asetek SimSports® sticker sheet
- USB Type-A to USB Type-C cable (Two (2) meters)
- USB Type-C to USB Type-C cable (Two (2) meters)
- Throttle/Clutch extension cable 100mm
- Throttle/Clutch extension cable 200mm
- M6x5 set screw (x2)
- M6x20 bolt (x8)
- M6 Slot nut (x8)
- Washer (x8)
- M6 Hex nut (x8)
- Allen Key, 3mm
- Allen key, 5mm
- Elastomer
  - Soft, Extra
  - Medium, Preinstalled
  - Hard, Extra
- Throttle Spring
  - Medium, Preinstalled
  - Soft, Extra

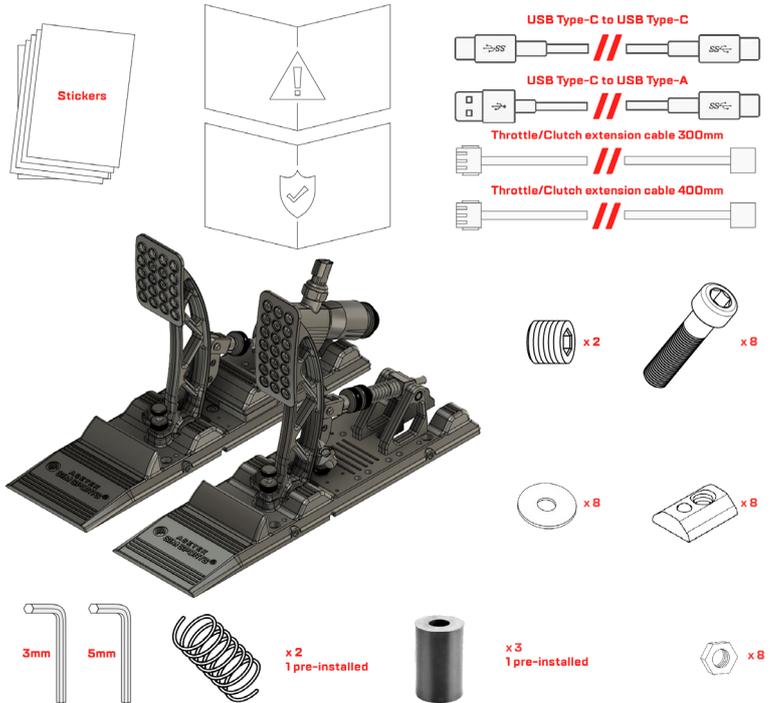

## 1.2 Videos

On the Asetek SimSports® YouTube channel (<https://www.youtube.com/aseteksimsports>), you will be able to find tutorial videos which, in detail, demonstrates numerous ways the pedals can be set up and used. You will also find additional information about the development and ambition for the Invicta™ S-Series pedals.

## 1.3 Manual version

This manual is version 1.1.

You will always be able to find the latest version of the manual at [www.asetek.com/simsports/knowledge-base/](http://www.asetek.com/simsports/knowledge-base/)

## 1.4 Support & Contact

Should you stumble upon further questions that are not covered in this manual or any of our detailed instruction videos, we encourage you to contact our friendly support staff at [support@aseteksimports.com](mailto:support@aseteksimsports.com)

# 2. Product

## 2.1 Intended Use

Thank you for purchasing the Asetek SimSports® Invicta™ S-Series pedals; you have made an excellent choice! Asetek SimSports® Invicta™ S-Series pedals will bring you to the next level of your Sim Racing career. Whether you are a beginning or experienced gamer, you will feel the immersion of being in a real race car while racing the tracks across the globe in the virtual space.

The Asetek SimSports® Invicta™ S-Series pedals are designed to be used in competitive sim racing and simulate the feel of a real race car. The pedals can be directly connected to any PC with a USB port and are intended to be mounted in a sim racing cockpit.



**The pedals are intended for indoor use only**



**Recommended ages 15 and above**



## 2.2 Compatibility

|                    |  |
|--------------------|--|
| <b>Platform(s)</b> | <b>PC (Windows 10, 11)</b>   |
| <b>Games</b>       | <b>Assetto Corsa</b><br><b>Assetto Corsa Competizione</b><br><b>DiRT Rally</b><br><b>DiRT Rally 2.0</b><br><b>F1 Series</b><br><b>iRacing</b><br><b>Project Cars 2</b><br><b>rFactor 2</b><br><br><b>+ many other games that accept direct input devices</b> |

## 2.3 Reasonably Foreseeable Unintended Use

The following is considered misuse and may void the warranty:


- Use of adaptors or extension sets for cables;
- Use of other cables than provided with the product;
- Use in an environment that varies from or exceeds the given environmental conditions;
- Use that varies from or exceeds the given operating conditions;
- Failure to comply with the instructions in this manual;
- Failure to eliminate faults, malfunctions, or defects of the product that impose safety risks;

- Unauthorized removal or modification of parts or safety devices of the product;
- Use of spare parts or accessories that Asetek SimSports® has not approved;
- Mounting and/or use of any parts in a vehicle;
- Adjusting pedal settings during operation;
- Operation in a flammable and/or explosive environment.
- Dropping the throttle (quickly and completely removing your foot) from the point of actuation. This would not be a use in a real car, and the pedals are not designed to withstand these forces.

## 2.4 General Specifications

|                        |  |
|------------------------|--|
| Dimensions (D x W x H) | 457 x 212 x 256 mm                                     |
| Weight                 | 3 kg   |
| Materials              | Pedals: Aluminum<br>PCB Housing: Plastic               |
| Brake Cylinder Fluid   | Hydraulic Oil  |
| Sensor Types           | Throttle: Hall sensor<br>Brake: Liquid Pressure Sensor |
| Power Input            | 5V 500mA - Max. 2,5W                                   |
| Operating Temperatures | 15°C to 35°C, room temperature                         |

# 3. Product Overview

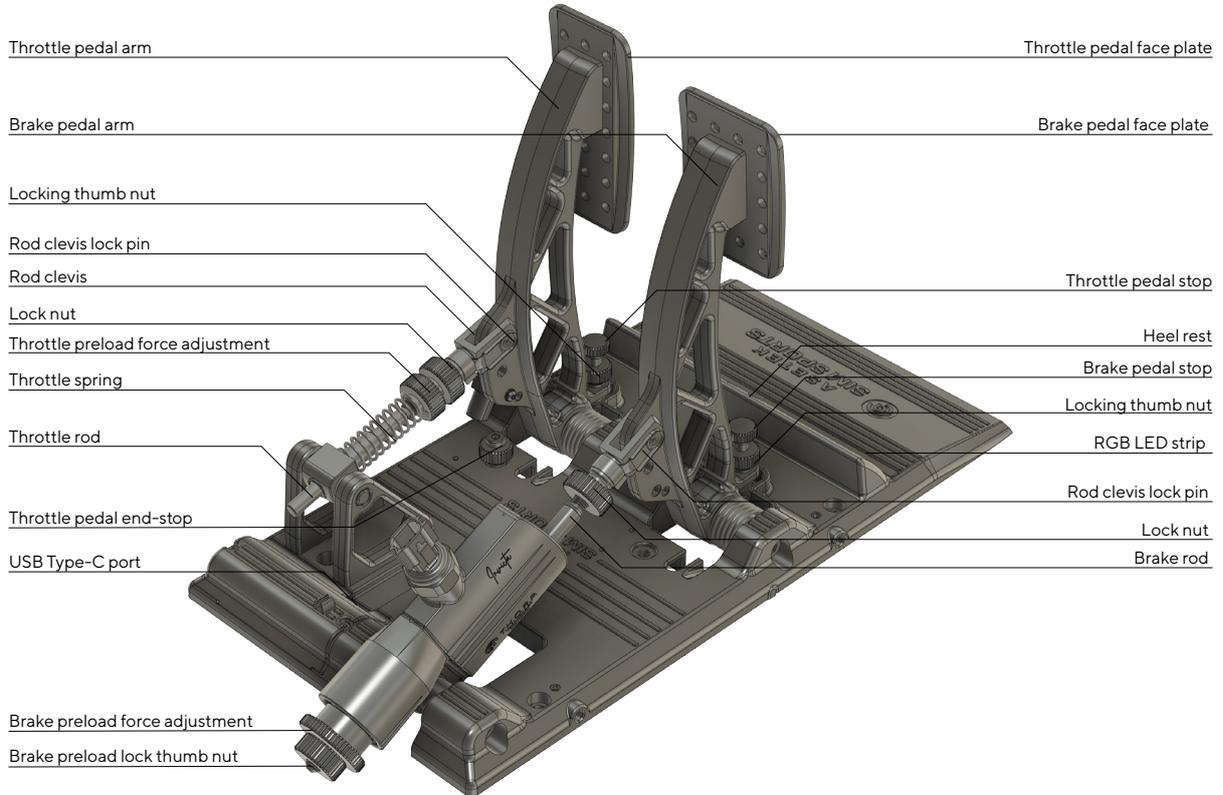

# 4. Getting Started

This section will teach you how to get your pedals set up and running. Later in the manual, you will learn much more about fine-tuning and software.

## 4.1 Installing your Pedals

### 4.1.1 Tools Required

To mount the pedals in your cockpit, you will need the following tools:

- Allen key, 3 mm (included)
- Allen key, 5 mm (included)
- Key wrench (not included)

### 4.1.2 Optional Tools

Depending on your rig and mounting preference, you may also need the following tools:


- Pencil or marker
- Screwdriver
- Power drill

### 4.1.3 Mounting to your Rig

The pedals are intended to be solely used while mounted to a sim racing rig.

Do not use the pedals without mounting them as they may shift during use and cause injury to you, bystanders, or our cockpit.  
**CAUTION**

Each pedal has four (4) mounting holes in fixed positions. As such, all adjustments to the positioning of the bases must be handled by your rig.


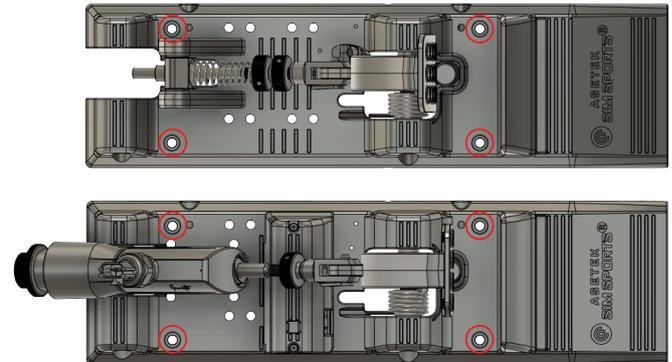


The baseplates are designed to be used with M6 screws, and holes in your rig should be with  $\varnothing 6,4$  diameter. It is also compatible with the included M6 slot nuts.

The Asetek SimSports® Invicta™ S-Series pedals are designed to withstand an extreme amount of braking force. Therefore, it is paramount that you install them on a very rigid base. Ideal conditions are in an aluminum profile cockpits, or a thick metal baseplate (as a minimum, we recommend: 3 mm, steel)

### Mounting your pedals:

1. Carefully remove excess dust and debris from the installation location.
2. Determine the spacing you want between your brake and throttle and insert the appropriate length of extension cable between your brake and throttle.
3. Place the brake and throttle pedals in their designated spot in your rig.
4. Align the holes in the pedals to four existing mounting holes in your sim rig, if available.

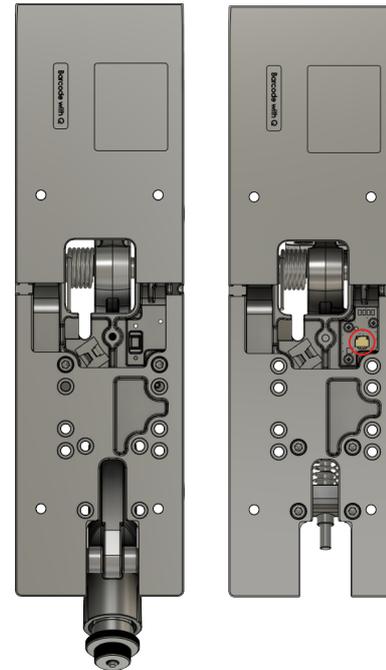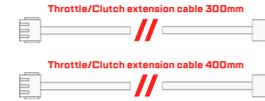

Do not use the pedals without mounting them.

5. Mount the pedals to the existing holes using the four (4) provided M6x20 screws, four (4) washers, and four (4) nuts or four (4) M6 slot nuts (depending on your rig).


If there are no holes available or they do not line up, you can use the mounting hole schematics available here:

[www.asetek.com/simsports/product/invicta-s-series-brake-and-throttle/](http://www.asetek.com/simsports/product/invicta-s-series-brake-and-throttle/) or continue to step 5:

6. Mark the drilling locations.
7. Remove the pedal and drill four (4) Ø6.4 mm holes.
8. Mount the pedals to the holes using the four (4) provided M6x20 screws, four (4) washers, and four (4) bolts or M6 slot nuts (depending on your rig).
9. To mount your (b/t) repeat the procedure above.

Congratulations. You have successfully mounted your Asetek SimSports® Invicta™ S-Series pedals to your rig. Enjoy the ride!

Note: If your rig is placed up against a wall, please make sure that there are minimum 5 cm of air between the rear of the brake cylinder and the wall, to avoid unnecessary friction between the two.

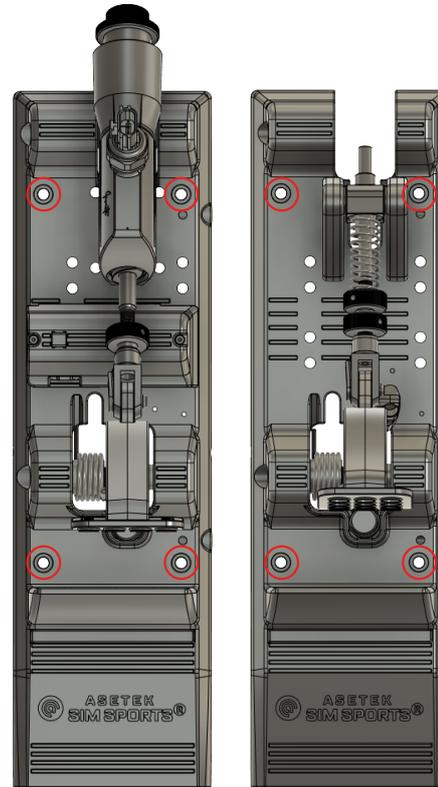

## 4.2 Adjusting the Pedals

### CAUTION

Avoid eye contact with the lubrication grease and wash hands thoroughly after adjustment.

It is essential to make sure you have the correct pedal angle in any racing style. Setting this correctly will ensure maximum braking efficiency, allow you to use muscle memory to your advantage, and make you go even faster around the track!

The pedals are set up in their default configuration (out of the box) to give you maximum immersion. In other words, they are set up to be focused on realism – like what you would find in a real race car. The brake is at 90° to the base, and the throttle tilted a few degrees forward. This allows for the most efficient braking and will allow you to train your muscle memory to perfection while also maximizing your trail braking potential. The throttle and clutch pedals are further forward to ensure that you will hit the brake pedal as the first thing in an emergency on track.

The above setup is how it works in a real race car. We recommend you drive for several hours first and try to adapt. In a real race car, where you often have different drivers in the car (as well as in many endurance sim races), the pedals are adjusted like the

above, and there is no opportunity to change that specifically to any driver. It is just physics that you will have the most efficient braking when the brake pedal is at a 90-degree angle.

## 4.2.1 Pedal Face Plate Adjustments

### NOTICE

Do not use a power drill, as this may damage the screws.

Invicta™ S-Series pedal face plates can be adjusted along the X and Y-axis. It will allow the pedals to accommodate a variety of different shoe sizes and increase performance and comfort for anyone using the pedals.

#### To adjust the position, follow these easy steps:

1. Remove the screws with an allen key from the pedal face plates
2. Align the pedal arms' holes with the pedal face plates' desired holes.



### NOTICE

Only use the holes marked green for mounting.

3. Insert and fasten the screws with an allen key.

Note: The screws can bite hard, so be careful not to overtighten or have the tool slip. Recommended torque: 2nm

## 4.2.2 How Does the T.H.O.R.P.™ System Function

You have chosen to buy the most realistic brake system ever made for sim racing. In any given race car, the brake pedal is always hard. A hard brake pedal is faster (you can brake later) and it is required to properly trail brake and use your muscle memory to do so, as explained later. You can consider a race car braking system as 2 stages:

The **“soft stage”**: When you apply pressure on the pedal, it will move 10-20 mm (measured on the pedal plate). You build up hydraulic pressure, while the caliper pistons are traveling to and pushing the brake pads against the brake disc. The movement also compensates for the small amount of play in all the mechanical parts on the pedal system that is required for them to not seize up. At this stage the car is slowing down but it is soft braking.

The **“hard stage”**: When hydraulic pressure is built up, the brake pads are squeezing the discs hard and all mechanical play is compensated. In this stage, your foot is basically “pressing against a wall”, because now your muscles are pressing directly against the hydraulic forces (the brake fluid). Since the fluid cannot be compressed, you will feel the pedal is hard. When a race car driver complains about a “long” or a “soft” pedal, it is

typically because there is air in the system, and since air CAN be compressed, the pedal will feel soft and long. The mechanics then bleed the brakes for air, meaning there is only fluid left in the system, and the pedal is once again hard after passing the “soft stage”.

In our quest to mimic the perfect race car feel, we also designed a 2-stage system on our Invicta™ S-Series pedals with the T.H.O.R.P.™ brake cylinder:

The **“soft stage”**: Since we do not have a brake disc, caliper and brake pads in a simulator, we made the slave cylinder to mimic this. The slave cylinder is compressing an elastomer, and like in a real race car, it will allow a pedal travel of maximum 20-25 mm measured on the pedal plate. When full pedal travel is obtained, the slave cylinder will hit a mechanical stop, just like in a real race as described above. We supply different elastomers to mimic different feelings of the “soft stage” but the different elastomers will not change the pedal travel, only how much force is needed to fully depress the pedal and engage the “hard stage”.

The **“hard stage”**: When the slave system is mechanically locked, you have 100% the same feeling as in a race car, when the brake pads are fully pressed against the brake disc, and your muscles are pressing directly against the hydraulic forces. This

is NOT simulated, this IS the same and identical feeling as in a race car, and you can keep pressing the pedal up to a hydraulic pressure of 100 bar, which corresponds to 185 kg of pressure on the pedal plate - the same as a real F1 car!

Besides from being able to calibrate and measure the pressure in bar, the 2-stage system is exactly the benefit you will get over a mechanical brake system. Most mechanical brakes are relying on the elastomers and a load cell to give you the race car feeling. It will never be the same, because it is NOT the same! A load cell system IS a simulation and at best, you can implement a mechanical stop to simulate the "hard stage", but unlike the T.H.O.R.P.™ system, your pressure readings in the simulator will also stop at that point, because your load cell will stop to physical deflect. And without deflection it will not measure. In the T.H.O.R.P.™ system, pressure readings will continue to rise despite the slave cylinder having reached its mechanical stop (passed the "soft stage").

**And THAT is the Asetek SimSports® Invicta™ S-Series  
T.H.O.R.P.™ hydraulic difference!**

---

It may surprise you, but as described above, having a hard brake pedal will help you get around the track faster. It all has to do with muscle memory and efficient trail braking.

Having a hard brake pedal will allow your muscle memory to be trained to perfection. Muscle memory is the subconscious telling your muscles just the right amount of pressure, leaving your conscious mind to take care of more important things at that moment - like watching traffic or hitting apex. Your muscle memory system is not wired to remember a position. Try to lift your hand with your eyes closed and reach the same spot within 0,5 mm 10 times in a row, and you will get the point. Conversely, your muscle memory can memorize a pressure extremely accurately, meaning going around a track; your muscle memory can make you brake the same way again and again. This cannot be achieved with a soft pedal - especially when trail braking. Furthermore, a hard brake pedal will allow you to brake later. Imagine having a brake pedal with 50 mm (common for many sim racers) of travel versus a brake pedal with almost zero travel. You are going 300 km/h down a straight. With the long travel brake, it will physically take you perhaps 1/10 of a second more to reach full braking power. On the stiff brake pedal, you will reach maximum braking power instantly. If you have three hard braking zones on a track, you will lose 3/10 of a second each lap.

The Top 10 in F1 or GT3 is frequently determined in way less than 3/10 of a second. The conclusion is that we at Asetek SimSports® have developed the Invicta™ S-Series pedals to replicate a real race car. Why? Because it is the fastest but may not be what

feels the most comfortable. It is your choice whether to be the quickest or have a brake pedal that feels soft and comfortable.

Using the two thumbnuts behind the elastomer, you can adjust the preload of the system closely mimicking the gap you will experience in a real car (between disc and brake pad). We have made this adjustable, so you can have the feeling just the way you like it – and just like your favorite car. For how to adjust this, see section 4.2.10 Brake Pedal Preload Adjustment.

Using RaceHub™, you can also adjust your deadzone on the brake pedal. This allows you to rest your foot on the pedal without getting inputs to the game.

## **NOTICE**


Should you wish to change the pedal stops, and thereby the angle of the pedals, it can be done entirely toolless. It will require you to recalibrate the pedals and remove the brake cylinder at the pedal arm and adjust the rod length to prevent any preload on the T.H.O.R.P.™ hydraulic master brake cylinder. Having a preload on the master cylinder will result in an inconsistent and a fluctuating calibration!

## 4.2.3 Adjusting the Brake Pedal Angle


1. To adjust the brake pedal angle, you will have to remove the clevis attaching the T.H.O.R.P.™ brake cylinder push rod to the pedal arm and swing the cylinder out of the way of the brake pedal. To achieve this you must first unlock the thumbnut on the rod.

### CAUTION


Please be aware that edges on the rod clevis can be sharp

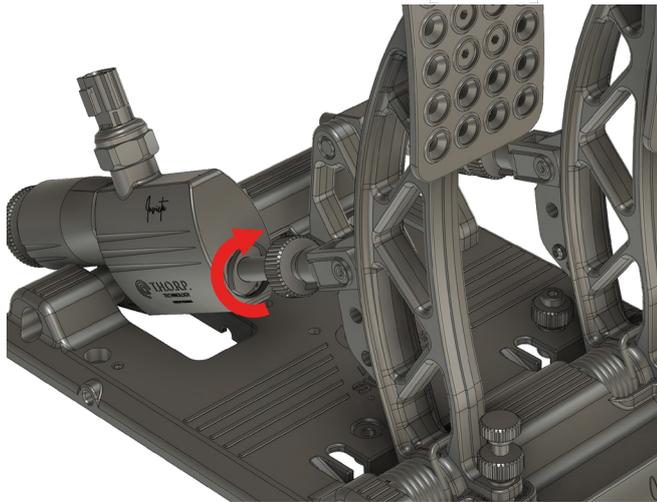

2. Remove the clevis lock pin

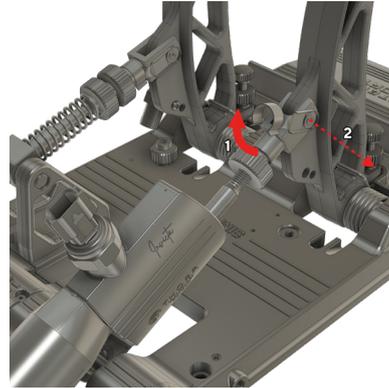


3. Swing the cylinder out of the way

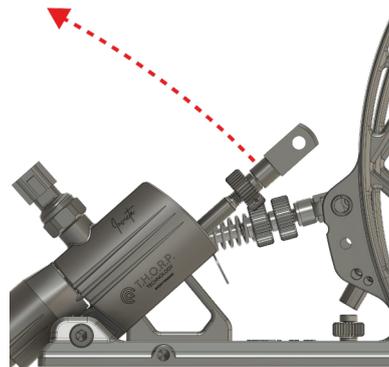


## NOTICE

Please note that on a flat surface, you will have to unmount the pedals, to achieve this.


4. When the cylinder is out of the way, you can adjust the pedal stops by loosening the locking thumbnut

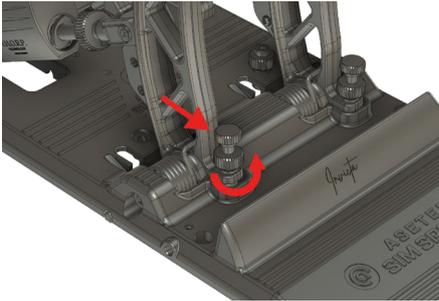

5. Push the pedal slightly forward, and rotate the thumbscrew

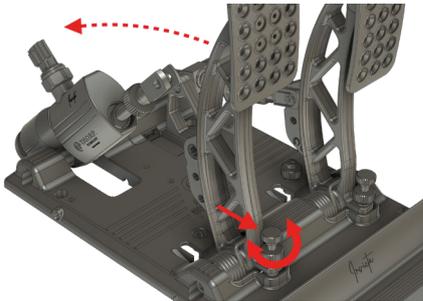

6. Once you have achieved your desired position, tighten the locking thumbnut

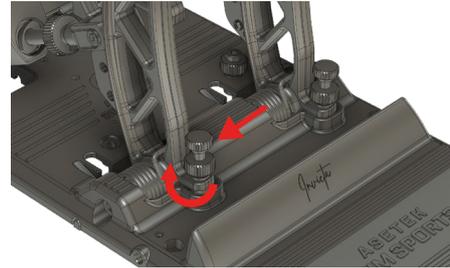


7. Adjust the pushrod length by turning the clevis until it perfectly matches up with the hole in the pedal arm. Re-insert the clevis lock pin.




This way, there is no preload on the brake cylinder, which is essential to achieve a 100% stable calibration and not prematurely wear out the brake cylinder. Once these steps are completed, you should recalibrate.

## 4.2.4 Throttle Pedal Angle Adjustment


1. You can adjust the pedal stops on the throttle pedal by loosening the locking thumbnut

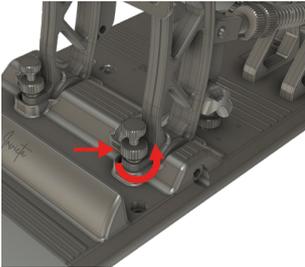


2. Remove the rod clevis and lift up the rod.

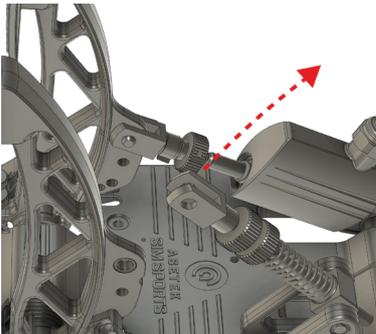

3. Push the pedal slightly forward, and rotate the thumbscrew (Clockwise to move the pedal forwards, Counter-Clockwise to move the pedal backwards)

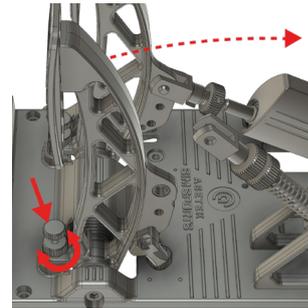

4. Once you have achieved your desired position, tighten the locking thumbnut

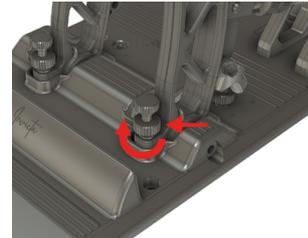

5. Recalibrate your pedals in RaceHub™ (see section 5.3 Pedal Calibration)

## 4.2.5 Throttle Preload Adjustment

### NOTICE

Always remember that the spring must not act as a stop, instead adjust the throttle pedal stop (see 4.2.7 throttle travel distance adjustment)

For the Invicta™ S-Series throttle, you have the option of replacing the spring for a softer feeling (4.2.6 Throttle Spring Replacement). But you can also adjust the preload on both springs.

Adjusting the preload on the throttle spring will shorten the overall spring length, increasing the amount of force needed to activate the throttle initially. Doing so will keep the throttle curves the same but change the initial power required to activate it.

Adjusting the throttle preload can be done in three (3) simple steps:


1. Turning clockwise, loosen the uppermost thumbnut, which locks the lowermost thumbnut in place. It is the one closest to the pedal itself.



2. Adjust preload on the spring by turning the bottom thumbnut (in contact with the spring):
  - a. Counterclockwise to tighten the preload, making the throttle require more force to engage.
  - b. Clockwise to reduce the preload, making the throttle require less force to engage.



3. Turn the uppermost thumbnut counterclockwise to re-tighten it, locking the bottom thumbnut in its position.

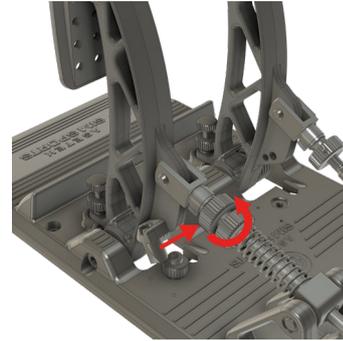

4. Recalibrate your pedals in RaceHub™.

 **NOTICE**

Remember to adjust the pedal stop, to make sure the pedal arm rests on the pedal stop and not the spring, when fully activated.




## 4.2.6 Throttle Spring Replacement

To give you a variety of different customization options, that allow you to bridge the gap between sim racing and real world racing with precision, we include two (2) springs with the Invicta™ S-Series pedals. One, the stiffer option, is preinstalled in the throttle. The other, is in the supplied box of accessories.

Replacing the throttle spring is a quick and easy process. Simply follow these seven (7) steps:

1. Remove the rod clevis lock pin.

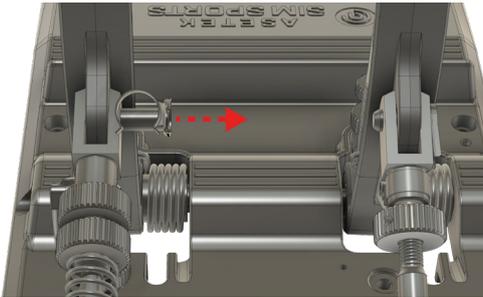


### CAUTION


Please be aware that edges on the rod clevis can be sharp




2. Lift the rod free of the pedal arm.

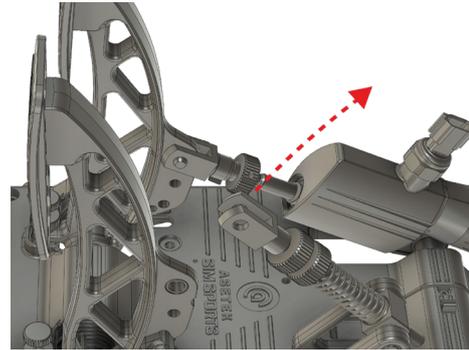


3. Remove the rod with spring from the pivot bracket.

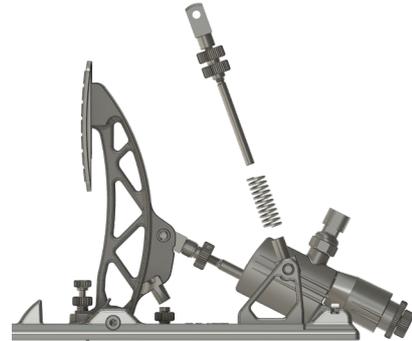

- a. At this point you can also access the installation point beneath, easily

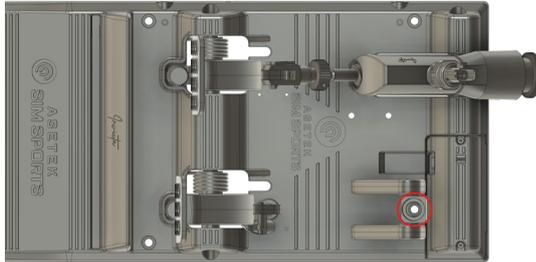

- 7. Reinsert the rod clevis lock pin, and make sure it is locked firmly into place

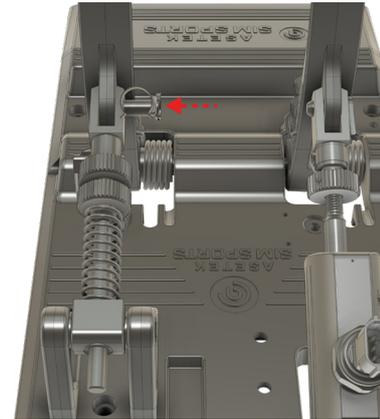

- 4. Remove the spring from the rod
- 5. Install your new spring on the rod
- 6. Reinsert the rod with spring, into the pivot bracket

**⚠ CAUTION**


Make sure the mounting of the pedal is set and all parts are secured tightly before use

## 4.2.7 Throttle Travel Distance Adjustment


The throttle can have its travel distance adjusted. This allows you to set a new pedal stop of your throttle pedal – essentially reducing the distance of activation and the feeling of resistance as you move through less of the available spring distance.

The process can be done in three (3) simple steps:


1. Loosen the thumbnut on the pedal stop, behind the pedal arm, by rotating it counterclockwise

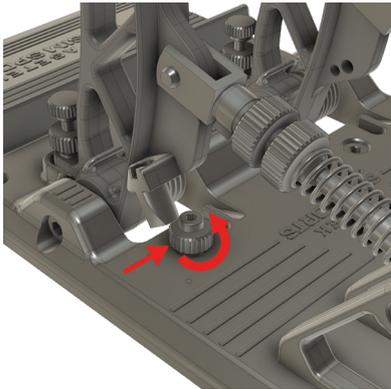

2. Use an allen key to adjust the height of the allen screw.

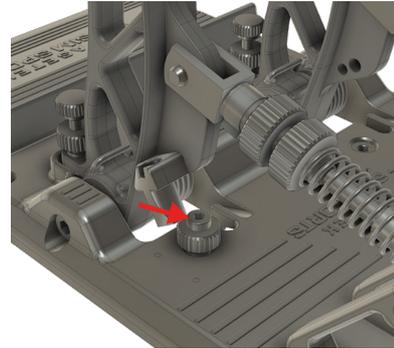

3. Re-tighten the thumbnut by rotating it clockwise.

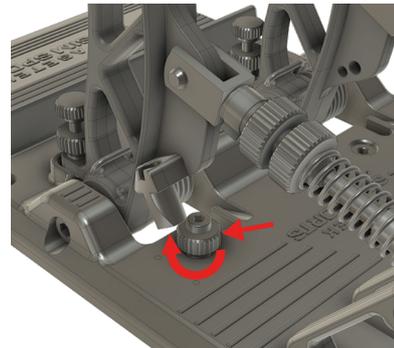

## 4.2.8 Swapping Elastomers

Swapping the included elastomers will allow you to customize the resistance on your brake pedal.

Be aware that by adjusting which elastomer you use, you effectively change the amount of travel you get with a certain amount of applied force. For example, applying 50 kg of force to the pedal may give you 12mm of travel with the white elastomer, but only 6mm with the green elastomer (note: not actual numbers).

You can adjust the pressure (bar) you want to be 100% brake force in RaceHub™.

Changing the elastomers is quick. Just follow these seven (7) simple steps:

1. Turn the outermost thumbnut counterclockwise until it comes off the shaft.



2. Turn the innermost, large thumbnut counterclockwise until it comes off the shaft.



3. The elastomer will now drop out, if not, simply pull it gently until removed from the shaft.
  - a. If you are experiencing difficulties with clearance, we suggest unmounting the pedals.



4. Insert your preferred elastomer – see section 4.2.9 for hardness



6. Grab the small thumbnut and turn it onto the shaft clockwise until it locks the larger thumbnut in place.



5. Grab the larger thumbnut and turn it onto the shaft clockwise until you reach your preferred setting (see 4.2.10. brake pedal preload adjustment).



7. Recalibrate the pedals in RaceHub™

## 4.2.9 Elastomer Types

We include three (3) different elastomers from the factory that provides different sensations.

### Elastomer Comparison Chart:

| New colors  | Old colors        | Firmness   |
|-------------|-------------------|------------|
| Red         | Yellow            | Extra Hard |
| Orange      | Green (with text) | Hard       |
| Yellow      | White             | Medium     |
| Green       | Black             | Soft       |
| Light Green | -                 | Extra Soft |

These are our recommendations if you want to adapt your pedal to something that will feel close to the real deal:

- Formula, LMP, and similar cars: Extra Hard or Hard
- Rally, Nascar, and GT: Hard or Medium
- Road cars: Soft or Extra Soft

Note: Please be aware that only the included elastomer lengths, hardness's and types, or those sold on the Asetek SimSports® Webshop, are officially supported by Asetek SimSports®. Failure as a result of using different elastomer hardness's, types, or lengths will void your warranty.

### CAUTION

Make sure the mounting of the pedal is set and all parts are secured tightly before use.

## 4.2.10 Brake Pedal Preload Adjustment

To simulate the caliper/pad to disc gap that exists in any real car – we have implemented a solution that easily lets you adjust just how much gap you want to use. To change the brake pedal preload, follow these steps:

1. Loosen the outermost, smaller thumbnut by rotating it counterclockwise until it comes off the shaft.
2. Rotate the innermost, larger thumbnut to adjust the amount of preload on your brake:
  - a. Clockwise to decrease the simulated distance between disc and caliper/pad. This will immediately engage the brake when you put your foot on it.
  - b. Counterclockwise to increase the simulated distance between the disc and caliper/pad. This will give you some play in the brake pedal before you actively engage the brake.



3. Re-tighten the outermost thumbnut by placing it on the shaft and rotating clockwise until it locks the innermost, larger thumbnut in place.



4. Recalibrate your pedals in RaceHub™.


 **CAUTION**

Make sure the mounting of the pedal is set and all parts are secured tightly before use


### 4.3 Connecting to your PC

In our relentless quest to make your experience as seamless and immersive as possible, we have gone to great lengths to simplify this process, too.

You will find a little dark-tinted plastic cover under the T.H.O.R.P.™ brake cylinder on your Invicta™ S-Series brake pedal. This houses the PCB for your entire pedal set (and your clutch, too, should you decide to add one). We have opted for a single USB Type-C interface to make things simple to connect and maintain.

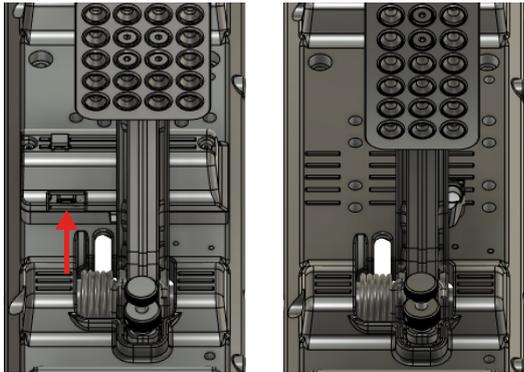

When installing your pedals, you will find that the USB Type-C female connector is pointing towards the throttle, not towards the pedal set's rear. This was a very intentional choice on our side to make sure you will not accidentally break the connector. Note also the small cable clip on the top of the cover. We want to make sure that your cable is not strained and suggest you use the provided clip to alleviate any potential strain on the cable.

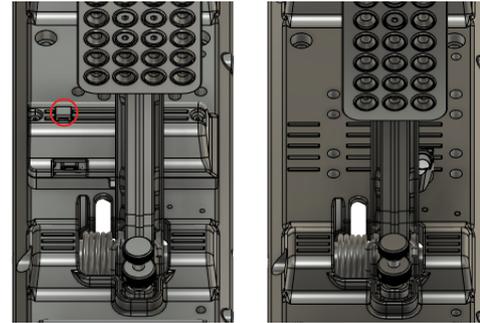

Connecting is now a simple task.

*If you connect directly to your PC, we recommend using the USB Type-C to USB Type-A cable.*

Plug the Type-C end into your pedals and the Type-A end into your PC. Your PC will recognize the Asetek SimSports® Invicta™ S-Series pedals. Proceed to install RaceHub™ and configure your pedals to your liking (See section 5 for instructions).

If you connect an Asetek SimSports® Direct-Drive wheelbase, we suggest using the USB Type-C to USB Type-C cable, to connect your pedals directly to your wheelbase.

Plug one end into your pedals and the other into your wheelbase. Open RaceHub™ and configure your pedals to your liking (See section 5 for instructions).

## **4.4 Start Racing!**

Your pedals are ready for racing – even without adjusting them in the software. From our factory, they are calibrated with a maximum pressure of 40 bar. The stock elastomer can be switched as you desire – our recommended is the standard medium elastomer (see section 4.2.9 for hardness). Again – before changing anything, try to drive for several hours and adapt to the feeling of a real race car.

Assign the pedals in your favorite simulator game, and you are ready to go.

# **5. RaceHub™ Adjustments**

All Asetek SimSports® products come with an extremely powerful yet easy-to-use piece of software that we have developed from the ground up. It is called RaceHub™ and will take care of your every need. RaceHub™ unlocks things you would not dare to dream and is continuously updated.

## **5.1 RaceHub™ Download**

RaceHub™ is available for download, in its newest version, on our website ([www.asetek.com/simsports/racehub/racehub-downloads/](http://www.asetek.com/simsports/racehub/racehub-downloads/)).

### **5.1.1 RaceHub™ Installation**

After completing the download from our website, double-click the downloaded file to initiate the installation. Follow the on-screen instructions and install them in your desired directory. Once installed, open RaceHub™ using the shortcut on your desktop or in your programs folder.

## 5.1.2 RaceHub™ Updating

RaceHub™ will automatically notify you if there are available updates for the software. If you want to double-check, please go to [www.asetek.com/simsports/racehub](http://www.asetek.com/simsports/racehub) and download the newest version.

RaceHub™ has a built-in feature that allows you to update the firmware on your devices automatically.

## 5.2 Introduction

Asetek SimSports® RaceHub™ allows you to make a plethora of adjustments to your Asetek SimSports® products. On the Invicta™ S-Series pedals, it will allow you to adjust pedal maps, calibrate your pedals, adjust the aRGB lighting, and much more.


Everything is available in a highly user-friendly interface that allows for quick and easy customization that not only gives you complete control but does it in a manner where you are constantly in focus – teaching you everything you need to know to become a power user and expert sim racer.

The settings that you choose in RaceHub™ will be applied to all the supported games found in section 2.2, “Compatibility”—ensuring maximum performance and precision!

## 5.3 Pedal Calibration

To ensure your pedals are as precise as they can be, you should run the pedal calibration wizard in RaceHub™. It is a quick and straightforward process that takes you through a series of activations that calibrate your pedals.

1. Navigate to the pane in RaceHub™ called Calibration
2. Push the calibrate button

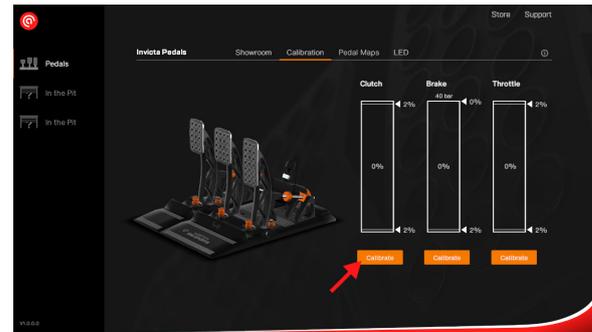

3. Follow the on screen instructions
4. Done! Your calibration will carry over into all the supported games.

Once your pedals are calibrated, only a few unique scenarios will cause a need for recalibration:

- a. If so desired, you have adjusted both mechanical pedal stops of your throttle and clutch pedals
- b. If so desired, you have adjusted the mechanical pedal stop of the brake pedal


## 5.4 Deadzone Adjustments

In RaceHub™, you will be able to set both top and bottom deadzones on all your pedals.

A bottom deadzone allows you to slightly activate your pedal without engaging the brake. For example if you rest your foot on the pedal.

A top deadzone allows you to modify the point of full activation. In the case of a throttle pedal, this would allow you to reach 100% throttle before your throttle pedal reaches full activation and the mechanical pedal stop. This preference is individual and generally done by a race engineer before the car goes on track. RaceHub™ allows you to customize it fully, and we strongly encourage you to do it as well, to not lose potential speed and lap time.

The top and bottom deadzones can be adjusted using this slider marked here:

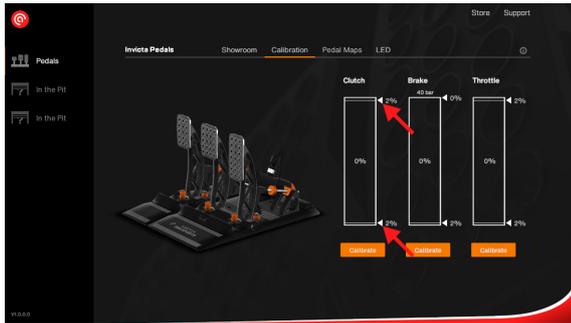

We suggest the following settings for deadzone when using the Asetek SimSports® Invicta™ S-Series pedals, which is how it is calibrated from our factory.

Throttle:

- Top: 2%
- Bottom: 2%

Brake:

- Top: 0%
- Bottom: 2%

## 5.5 Maximum Brake Force Adjustment

RaceHub™ allows you to calibrate your brake with accurate hydraulic measurements like in a real race car, giving you the ultimate immersion and precision you would get in a real car. The calibration of your Invicta™ S-Series pedals is measured in a numerical value of bar pressure.

The maximum pressure supported is 100 bar, which directly corresponds to 185 kilos of pressure.

However should you require less pressure to reach what the simulator is recognizing to be 100% brake application, you can calibrate whichever pressure you want to equal 100%.

## 5.6 Custom Pedal Mapping

One of the great features of RaceHub™ is the ability to map the curves of your pedals precisely to your liking. In most racing simulator pedals, you will find a 1:1 relation between the amount pressed on the pedal and the response in-game. This is not how things work in real racing – so why should it be this way in your sim rig? The answer is, it should not, and our pedal maps help you avoid just that.

We have made a few preset curves that mimic typical scenarios, but the RaceHub™ software also allows complete customization of your pedal curves. Click, drag and drop – it is that simple!



As we briefly mentioned, a real race car will not have a linear throttle response. An example will be an Audi R8 LMS GT3, which has less activation of the throttle at the beginning of the pedal activation, increasing as you progress through the travel. Similarly, you can adjust your curves based on your driving conditions—all in search of ultimate performance.



Please note that RaceHub™ custom pedal maps work best when they are used exclusively and without the use of potential in-game settings. If your preferred simulator game offers a pedal mapping feature, we highly suggest you leave it as linear and instead use the functionality in RaceHub™.

# 6. Maintenance

Owning a set of Invicta™ S-Series pedals means a minimum of maintenance needed. However, we do have a few suggestions that will help you keep your pedals feeling supreme.

## 6.1 Throttle Maintenance

We suggest you clean the throttle with regular intervals (6 months) with a soft, dry, clean cloth.

If unwanted rubbing sounds occur, we suggest using PTFE Dry Spray.

### NOTICE

Do not use water or cleaning agents to clean the product.

## 6.2 Brake Maintenance

We suggest you clean the brake with regular intervals (3 months or 100 hours of use) with a soft, dry, clean cloth.

Likewise, with regular intervals, we suggest lubricating the rods of the hydraulic cylinder with mineral oil.

### NOTICE

Do not use water or cleaning agents to clean the product.

## 6.3 Spare Parts

We strongly advise you to only use original Asetek SimSports® spare parts. Failure to do so will void your warranty.


If you have questions, or do not know if you have an original part, please refer to [www.aseteksimsports.com](http://www.aseteksimsports.com) or consult the Asetek SimSports® support via: [www.asetek.com/simsports/support](http://www.asetek.com/simsports/support)

## 7. Troubleshooting

Sometimes unforeseen issues occur. But do not worry, we are here to help.

If you are having issues we suggest consulting the FAQ on [www.asetek.com/simsports/knowledge-base-category/f-a-q-troubleshooting/](http://www.asetek.com/simsports/knowledge-base-category/f-a-q-troubleshooting/)

If you are not able to find a solution on the FAQ please consult our friendly and knowledgeable support staff via [www.asetek.com/simsports/support](http://www.asetek.com/simsports/support) or through our social channels.

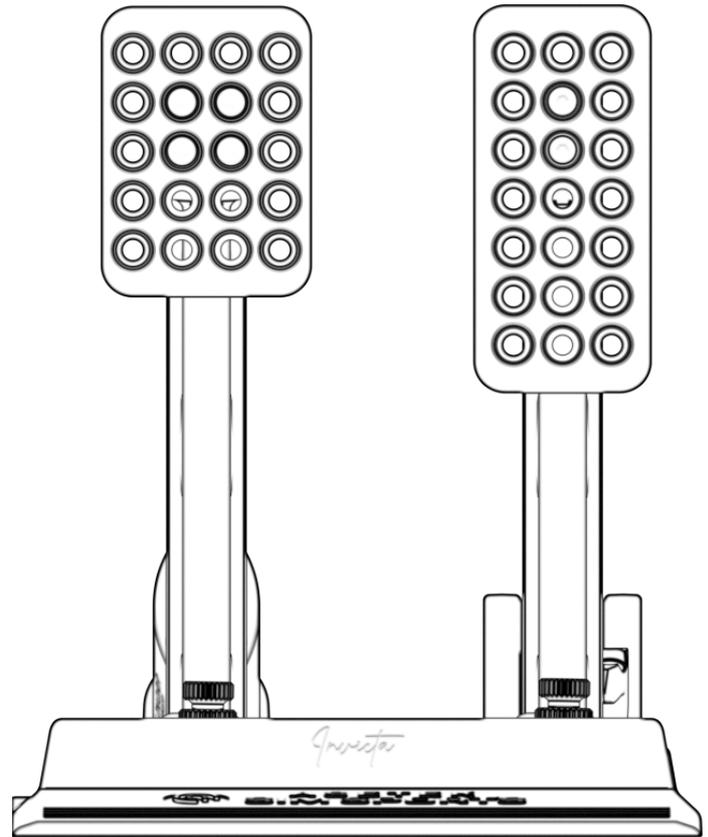


## 8. Safety

- The device must not be exposed to rain or humidity to avoid the risk of fire and electric shock.
- We strongly advise you not to drive a vehicle immediately after racing simulation games.
- This product is not intended for children under the age of 15 years.
- Contains small pieces. Danger of swallowing!
- Extended periods of gaming may cause health risks. Take a break of 5 minutes every 20 minutes, and do not play for more than 2 hours per day.
- Keep hands, fingers, hair, clothing, and jewelry away from the product when in use.
- Only one person may use the product at any given time. Keep other persons away from the product when in use.
- Keep the product and the power cord away from children and pets.
- This product contains components that the user cannot repair. Opening parts of the product may compromise the safe use of the product and will void the warranty.
- Do not disassemble this product beyond what is described in the product manual.
- Avoid eye contact with the lubrication grease and wash hands thoroughly after adjustment.
- Make sure the mounting of the pedal set and all parts are secured tightly before use.
- Check frequently that the pedals are mounted properly
- Be aware that the rod clevis has sharp edges
- In the unlikely event of hydraulic oil leakage, avoid contact with skin. In case of exposure, wash the contaminated area thoroughly with soap and water. Do not ingest.



# 9. De-commissioning & Sustainability

At Asetek we are fiercely committed to making the world a sustainable place. You can read more about Asetek's sustainability efforts, including our sustainability reports, here: [www.asetek.com/company/sustainability](http://www.asetek.com/company/sustainability)

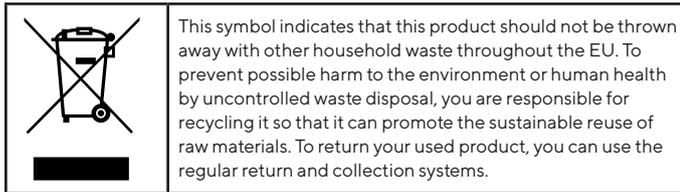

## 9.1 Packaging

All packaging is made out of paper and cardboard. All our cardboard and paper products are labeled with the FSC mark, ensuring maximum reusability and that the forests are sustainably forested. Furthermore, we regularly check our vendors to make sure they are upholding their commitments.

About FSC: [www.fsc.org/en/fsc-labels](http://www.fsc.org/en/fsc-labels)

If you need to dispose of your packaging, please use the appropriate paper waste stream in your country, to dispose of the packaging. Naturally, we hope you want to keep it around – we are quite proud of it.

## 9.2 Product

Asetek SimSports® is committed to making products that will last. However, we also know that sometimes things break, and that should not result in a scrap and forget, producing even more e-waste to our planet. That is why we are dedicated to supporting you and all other users with spare parts where possible, and in case of parts of the product defuncting, we offer return shipping of the part along with a new service part. We will then make sure the original part is de-commissioned in an environmentally sound manner.


If you feel uncertain about how to recycle any Asetek SimSports® product, we suggest getting in touch with our dedicated customer support team, who will happily help you.

Contact them here: [www.asetek.com/simsports/support](http://www.asetek.com/simsports/support)



### 9.3 Production

The Asetek SimSports® Invicta™ S-Series Pedals are produced using primarily aluminum die-casting and forging techniques. As such, any waste aluminum is re-used, minimizing waste.

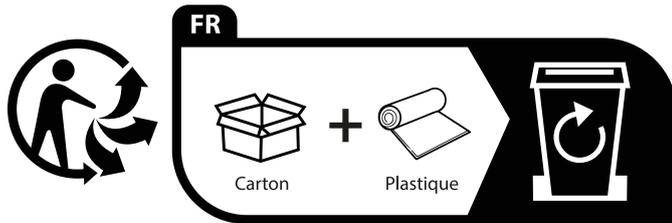


Points de collecte sur [www.quefairedemesdechets.fr](http://www.quefairedemesdechets.fr)  
 Privilégiez la réparation ou le don de votre appareil !

## 10. Declaration of Conformity

We, Asetek, as manufacturer, declare that the Invicta™ S-Series products from the brand Asetek, produced in Denmark are tested according to all relevant CE standards/regulations and passed all tests.

The complete Declaration of Conformity can be found and downloaded via [www.asetek.com/simsports/product/invicta-s-series-brake-and-throttle/](http://www.asetek.com/simsports/product/invicta-s-series-brake-and-throttle/)

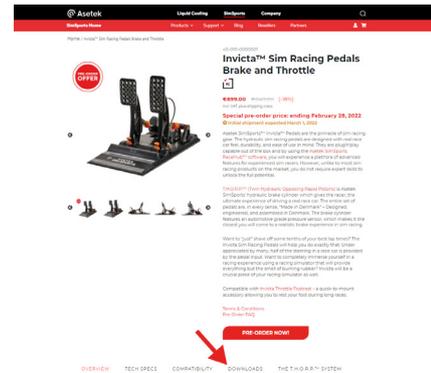



Invicta™ - S